

HRD-842

16CH 4M Analog HD DVR




Key Features

- 16CH 4MP AHD DVR
- TVI, CVI (Max. 2MP), Analog camera input support
- Up to 120 / 100 (4M)fps recording rate
- Up to 240 / 200 (1080p)fps recording rate
- HDMI / VGA video output
- 8CH audio inputs / 1CH audio output
- Up to 4 Internal HDDs
- Coaxial Cable (Pelco-C, ACP)
- Smart phone support (Android, iOS)

Dimensions

Unit : mm (inch)

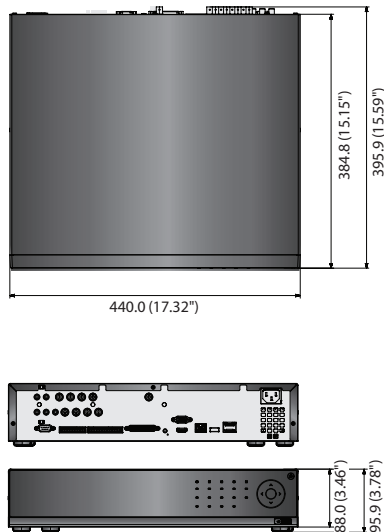

HRD-842

DISPLAY		
Video	Inputs	16CH BNC : AHD (2MP, 4MP), TVI (2MP), CVI (2MP), NTSC / PAL
	Resolution	2560 x 1440, 1920 x 1080, 960 x 480, 704 x 480, 960 x 576, 704 x 576
Live	Frame Rate	240fps, 200fps
	Resolution	2560 x 1440, 1920 x 1080, 960 x 480, 704 x 480, 960 x 576, 704 x 576
	Multi Screen Display	1 / 4 / 7 / 9 / PIP / Sequence
PERFORMANCE		
Operating System	Embedded	Linux
	Compression	H.264
Recording	Record Rate	NTSC : Up to 120fps@4MP / PAL : Up to 100fps@4MP NTSC : Up to 240fps@1920 x 1080 / PAL : Up to 200fps@1920 x 1080 NTSC : Up to 240fps@1280 x 720, 928 x 480, 704 x 480, 704 x 240, 352 x 240 PAL : Up to 200fps@1280 x 720, 928 x 576, 704 x 576, 704 x 288, 352 x 288
	Mode	Manual, Schedule (Continuous / Event), Event (Pre / Post), Time lapse (1 ~ 30fps(N), 1 ~ 25fps(P))
	Event	Video Loss, Motion (Level 1 ~ 10), Alarm Input (16), Tampering (Level Low, Medium, High)
	Overwrite Modes	Continuous
	Pre-alarm	Up to 30 sec (5, 10, 20, 30 sec)
	Post-alarm	Up to 6 hour (5, 10, 20, 30 sec, 1, 3, 5, 10, 20 Min, 1, 2, 3, 4, 5, 6 hour)
Search & Playback	Search Mode	Date / Time, Event, Back up, POS (SD Signal only), Motion (※ All Search Included Preview Function)
	Playback Function	Fast forward / backward (2x, 4x, 8x, 16x, 32x, 64x) *Backward play with i-frame only Slow forward / backward (1/2x, 1/4x, 1/8x) Step Forward / backward ※ Backward play with I-frame only
Network (IPv4)	Transmission Speed	Record Stream : 4M : 15fps, 1080p / 720p / WD1 / 4CIF / CIF (NTSC : 30fps, PAL : 25fps) Network Stream : WD1 / 4CIF : 12fps, 2CIF / CIF (NTSC : 30fps, PAL : 25fps)
	Bandwidth	Up to 64Mbps
	Bandwidth Control	Selectable
	Stream	Record stream and network stream selectable (at monitoring viewer)
Smart Phone	Max. Remote Users	Search 3 / Live unicast 10 / Live multicast 20
	Protocol Support	TCP/IP, DHCP, PPPoE, SMTP, NTP, HTTP, DDNS, RTP, RTSP, SNMP
	Monitoring	SSM, WebViewer, SmartViewer, iPOLiS Mobile Viewer
	Platform	Android, iOS
Storage	Protocol Support	RTP, RTSP, HTTP
	Control	Live (8CH) : Multi-profile support playback (1CH)
	Max. Remote Users	Search 3 / Live unicast 10 / multicast 20
Security	Internal HDD	Up to 4 SATA HDDs (0~6TB HDD)
	External (e-SATA Interface)	e-SATA, USB (for Backup)
	File Format (Backup)	BU (DVR player), SEC (Include player), AVI
Interface	Password Protection	1 Admin, 10 Group, 10 User per 1 Group
	Data Authentication	Watermark
Monitors	VGA	1 VGA (1920 x 1080, 1280 x 1024, 1280 x 720)
	HDMI	1 HDMI (4K (3840 x 2160), 2K (2560 x 1440), 1920 x 1080, 1280 x 1024, 1280 x 720)
	Spot Composite	BNC (1CH) ※ Included OSD on screen, Multi mode support
Audio	Inputs / Output	8CH line in (Built-in 4CH, Option : Audio extension cable) / 1CH line out
	Compression	G.711
	Sampling Rate	8KHz
Alarm	Inputs / Output	Terminal 8 inputs (NO/NC) / Terminal 4 Relay outputs (NO/NC), Rating : Max. DC18V 2A, Typical DC12V 2A
	Remote Notification	Notification Via E-mail
Connections	Ethernet	1 RJ45 10/100/1000 Base-T
	Serial Interface	RS-485 (Full duplex) for PTZ, Samsung system keyboard
	USB	1 port (USB 3.0, Rear), 1 port (USB 2.0, Front)
	e-SATA	2 External SATA ports
	Application Support	Mouse, IR Remocon
GENERAL	RS-485 Protocol	Samsung-T/E, Pelco-D/P, Panasonic, Phillips, AD, DIAMOND, ERNA, KALATEL, VCL TP, VICON, ELMO, GE
	Coax Protocol	NTSC/PAL : Pelco-C (Coaxitron), AHD : ACP (AHD Coax Protocol)
Electrical	Input Voltage / Current	100 ~ 240V AC ±10%, 50/60 Hz
	Power Consumption	Max. 25W (1 x 2T HDD)
	Operating Temperature	+0°C ~ +40°C (+32°F ~ +104°F)
Environmental	Operating Humidity	20% ~ 85% RH
	Dimensions (WxHxD)	440 x 88.0 x 384.8mm (17.32" x 3.46" x 15.15")
Mechanical	Weight (With hard disks)	Approx. 5.24Kg (11.55 lb)
	GUI	English, French, German, Spanish, Italian, Russian, Polish, Czech, Turkish, Netherlands, Portuguese, Swedish, Danish, Rumania, Serbia, Croatia, Hungary, Greek, Finnish, Norwegian, Korean, Japanese, Chinese (Traditional), Thai
LAUGUAGE	Web Browser	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese (Simplified), Japanese, Thai

* The latest product information / specification can be found at hanwha-security.com

* Design and specifications are subject to change without notice.

* Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.