

XRN-1610S

16CH Network Video Recorder with PoE Switch




Key Features

- Up to 16CH 12Megapixel Supported
- H.265, H.264, MJPEG Codec Supported
- WiseStream Support
- 180Mbps Network Camera Recording
- Plug & Play by 16 PoE/PoE+ Ports
- Max. 4HDDs, e-SATA Storage Supported
- HDMI / VGA Local Monitor

Dimensions

Unit : mm (inch)

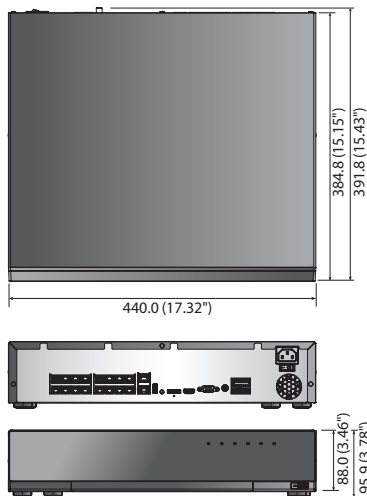

XRN-1610S

DISPLAY		
Video	Inputs / Resolution	Up to 16CH / CIF ~ 12MP
	Protocols	Samsung, ONVIF
	Local Display	1x HDMI, 1x VGA dual monitor
Live	Multi Screen Display	[Local monitor] 1 / 2V / 3V / 4 / 6 / 8 / 9 / 13 / 16 / Auto Sequence, [Web] 1 / 4 / 9 / 16 / Auto Sequence
	Performance	[Local monitor] 12MP (30fps), 8MP (120fps), 5MP (180fps), 3MP (240fps), 2MP (480fps), 720p (480fps), D1 (480fps) [Web] 5MP (30fps), 3MP (60fps), 2MP (120fps), 720p (240fps), D1 (480fps)
PERFORMANCE		
Operating System	Embedded	Linux
	Compression	H.265, H.264, MJPEG, WiseStream (H.265 / H.264)
	Recording Bandwidth	180Mbps
Recording	Resolution	CIF ~ 12MP
	Mode	Manual, Schedule (Continuous / Event), Event (Pre / Post)
	Event Trigger	Alarm Input (8), Video loss, Camera Event (Sensor, MD, Video analytics), VA event (Tampering, Enter / Exit, Passing, Virtual-line, (Dis) Appear, Face Detection, Audio detection), Defocus camera event
Search & Playback	Event Action	E-mail, PTZ preset, Alarm Out, Buzzer, Monitor Out
	Playback Bandwidth	32Mbps (16CH simultaneously)
	Performance	Max. 4 users (Set 1, Remote 3)
Storage	Mode	Date & Time (Calendar) / Event log list / Text Search (POS, ANPR)
	Simultaneous Playback	Max. 16CH (Local monitor, Network)
	Resolution	CIF ~ 12MP
Backup	Fish-eye Dewarping	Processed on Web / CMS
	Playback Control	Fast/Slow Forward/Backward, Move One Step Up / Down
	Default Built-in	0TB ~ 6TB
Sensor	Internal / External	4 SATA (Max. 24TB) / 1 e-SATA, iSCSI (Max. 384TB * PROMISE VESSRAID R2600)
	File Backup	BU/EXE (GUI), JPG/AVI (Network)
	Function	Max. 16CH play, Date-time / Title display
Audio	Input / Output	8 / 4 (NO/NC selectable)
	Input / Compression	16CH (Network) / G.711, G.726, AAC (16/48KHz)
	Audio Communication	2-way (Pass-through between camera and SSM)
NETWORK		
Protocol Support		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI (Server, Client)
	DDNS	iPOLiS DDNS
	Transmission Bandwidth	Max. 256Mbps (iSCSI off) (128Mbps, iSCSI on)
Security	Max. Remote Users	Search 3 / Live unicast 10 / Live multicast 20
	IP	IPv4 / IPv6
		IP address filtering, User access log, 802.1x Authentication, Encryption (ID/PW, Recording, Transmission, Backup)
Language	GUI / Web	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai (GUI)
	OS	Supported OS : Window XP (Service pack 2 or above), Vista, 7, 8, 10, Mac OS X (10.7 or above)
	Web Browser	Plug-in free Web Viewer - Supported Browser : Google Chrome 47, MS Edge 20 - WMF : 1CH live (800 x 600), Setup Plug-in Web Viewer - Supported Browser : MS Explore 11, Mozilla Firefox 43, Apple Safari 9 * Mac OS X only
Viewer Software	Type	SSM, Web Viewer, SmartViewer, iPOLiS Mobile Viewer
	CMS Support	SDK / CGI (SUNAPI)
FUNCTIONS		
Camera Setup	Register	PnP Mode, Manual Mode
	Setup Items	1) IP Address, Add profile edit, Bitrate, Compression, GOP, Quality 2) Camera Event Setup - MD, VA : Tampering, Enter / Exit, Passing (Virtual-line), (Dis) Appear, Face detection, Audio detection) 3) Video Setup (Simple focus, Brightness / Contrast, Flip / Mirror, IRIS, WDR, D&N, SSM, Shutter, SSSD, Dis) 4) Fisheye Dewarping, Hallway View setup, Camera webpage
	PoE (PoE+)	Monitor PoE/PoE+ Power Consumption, On/Off Control for Each PoE/PoE+ Camera, Remote Reset for Each PoE/PoE+ Camera
Easy Configuration	Time Sync.	NVR time protocol for PoE/PoE+ Camera (Time Sync Based on NVR Time)
	ARB (Auto Recovery Backup)	Setup Wizard (Language Date/Time, Network, Auto Camera Configuration) * Selectable between PnP and manual mode
	PTZ	Yes
Smart Phone	Control / Preset	Via GUI, Web Viewer, SPC-2000 (USB) / 255 presets
	OS / Protocol Support	Android, iOS / RTP, RTSP, HTTP, CGI (SUNAPI)
	Max. Remote Users	Live (16CH) : Multi-Profile Support, Playback (1CH, Max. 2MP) Search 3 / Live unicast 10 / Live multicast 20
System Control	Mouse, IR Remocon, Web, SPC-2000 (USB)	
INDICATOR / INTERFACE		
Front	Indicator	Power status LED 1ea, HDD Action LED 1ea, Alarm Status LED 1ea Record status LED 1ea, Network Action LED 1ea, Backup LED 1ea
	USB	2ea (Front 1ea / Rear 1ea)
	HDMI	Main : 1ea (Both Support Live / PB / Setup) Support up to 4K (3840 x 2160, Single monitor mode)
Connections	VGA	Sub : 1ea (Support live screen up to 16 div. mode)
	Audio / Serial	Out 1ea (RCA, Line) / 1ea for UPS (Plan to Support as project basis)
	Ethernet	16ea (PoE (PoE+), 100Mbps), 2ea (LAN/WAN, 1Gbps) - LAN : Downlink to Camera / PoE (PoE+) Hub - WAN : Uplink to CMS
Reset / Power Cord	Alarm	In 8ea (Terminal block) / Out 4ea (Terminal block)
SYSTEM		
Log	Log List	Max. 20,000 (System log, Event log each)
GENERAL		
Electrical	Input Voltage / Current	100 ~ 240V AC
	Power Consumption	Max. 271.9W (4 HDDs, PoE/PoE+ on), Max. 51.9W (4 HDDs, PoE/PoE+ Off) * PoE/PoE+ Budget : Max. 220W
Environmental	Operating Temperature	+0°C ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	20% ~ 85% RH
Mechanical	Color / Material	Black / Metal
	Dimensions (WxHxD)	440.0 x 88.0 x 384.8mm (17.32" x 3.46" x 15.15") (2U)
	Weight	5.1Kg (11.24 lb)

* The latest product information / specification can be found at hanwha-security.com

* Design and specifications are subject to change without notice.

* Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.