

# XRN-2011

32CH Network Video Recorder




## Key Features

- Up to 32CH, Max. 12MP Camera supported
- 256Mbps network camera recording
- Support 4K video out on HDMI monitor
- Support Dual monitor video out
- Support H.265, H.264, MJPEG compression
- WiseStream support
- Max. 8 internal HDDs (48TB), e-SATA / iSCSI storage support
- Support RAID 5
- Easy installation with front swap hard disks
- ARB & Failover (N+1) support

## Dimensions

Unit : mm (inch)

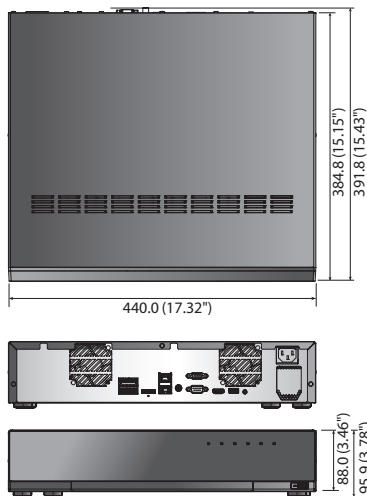

		XRN-2011
<b>DISPLAY</b>		
Video	Inputs	Up to 32CH
	Resolution	CIF ~ 12MP
	Protocols	Samsung, ONVIF
Live	Local Display	1x HDMI, 1x VGA dual monitor
	Multi Screen Display	[Local monitor] 1 / 2V / 3V / 4 / 9 / 16 / 25 / 36 / Sequence, [Web] 1 / 4 / 9 / 16 / 25 / 36 / Sequence
	Performance	[Local monitor] 12M (30fps), 8.3M (120fps), 1080p (480fps), 720P (960fps), D1 (960fps)
<b>PERFORMANCE</b>		
Operating System	Embedded	Linux
Recording	Compression	H.265, H.264, MJPEG, WiseStream (H.265, H.264)
	Recording Bandwidth	Max. 256Mbps, Max. 100Mbps (RAID 5 mode)
	Resolution	CIF ~ 12MP
	Mode	Normal, Schedule (Continuous / Event), Event (Pre / Post)
	Event Trigger	Alarm input, Video loss, Camera event (Sensor, MD, Video analytics)
Search & Playback	Event Action	E-mail, PTZ preset, Alarm out, Buzzer, Monitor out
	Playback Bandwidth	32Mbps (16CH simultaneously)
	Performance	Max. 4 users (Local 1, Remote 3)
	Mode	Date & Time (Calendar) / Event log list / Text search (POS, ANPR)
	Simultaneous Playback	Max. 16CH (Local monitor, CMS)
Storage	Resolution	CIF ~ 12MP
	Fish-eye Dewarping	WEB / CMS
	Playback Control	Fast/Slow Forward/Backward, Move one step up/down
	Built-in / Internal HDD	0TB ~ 6TB / 8 (Hot swap) - Max. 48TB (Non-RAID), Max. 36TB (RAID 5)
	External	iSCSI storage (Max. 384TB), Promise VessRaid R2600
Backup	RAID	RAID 5 (Array size : 4 HDD x 2 array)
	File Backup (Via Web)	BU/Exe (GUI), JPG/AVI (Network)
Sensor	Function	Multi channel (Up to 16CH) play, Date-time/title display
	Input / Output	8 / 4 (NO/NC selectable)
Audio	Input	32CH (Network)
	Compression	G.711, G.726, AAC (16/48KHz)
	Audio Communication	2-way
<b>NETWORK</b>		
Interface		RJ-45, Gigabit ethernet x 2
Protocol Support		TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), PPPoE, SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI (Server, Client)
DDNS		iPOLiS DDNS
Transmission Bandwidth		512Mbps (iSCSI off), 256Mbps (iSCSI on)
Max. Remote Users		Search 3 / Live unicast 10 / Live multicast 20
IP		IPv4 / IPv6
Security		IP address filtering, User access log, 802.1x authentication, Encryption
Language		English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai
OS		Window 7, 8, 10, Mac OS X (10.8 or above)
Web Browser		MS IE, Google Chrome, Mac Safari, Firefox
Viewer	Type	SSM, Webviewer, SmartViewer, iPOLiS mobile viewer
Software	CMS Support	SDK / CGI (SUNAPI)
<b>FUNCTIONS</b>		
Camera Setup	Register	Auto, Manual
	Setup Items	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup, Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SDDR, DIS), Fisheye dewarping mode, Hallway view setup, Camera webpage
PTZ	Control / Preset	Via GUI, Webviewer, SPC-2000 / 255 presets
Smart Phone	OS	Android, iOS
	Protocol Support	RTP, RTSP, HTTP, CGI (SUNAPI)
	Control	Live (16CH) : Multi-profile support, Playback (1CH)
Redundancy	Max. Remote Users	Search 3 / Live unicast 10
	Failover / ARB	N + 1 / Yes
System Control		Mouse, Web, SPC-2000 (Controller)
<b>INDICATOR / INTERFACE</b>		
Front	Indicator	LED (Status indicator) : 6ea HDD action 1, Alarm 1, Power 1, Record 1, RAID 1, Network1
	HDMI	Main : 1ea (Both support Live / PB / Setup) Support up to 4K (3840 x 2160, Single monitor mode)
	VGA	Sub : 1ea (Support live screen up to 16 div. mode)
	Audio	Out 1ea (RCA, Line)
Connections	Ethernet	RJ-45 2ea (LAN/WAN, 1Gbps)
	Alarm	In 8ea (Terminal block), Alarm reset 1ea Out 4ea (Terminal block) - Relay out1 (NO/NC/COM) - Relay out 2 ~ 4 (NO/COM)
	USB	2ea (Front 1, Rear 1)
	Storage	1 e-SATA
	Serial / Reset	RS-232C / Switch 1ea
	Power Cord	1ea AC Inlet
<b>SYSTEM</b>		
Log	Log List	Max. 20,000 (System log, Event log each)
<b>GENERAL</b>		
Electrical	Input Voltage / Current	100 ~ 240V AC ±10%, 50/60Hz / 4 ~ 1.5A
	Power Consumption	Max. 99W (338BTU, 6TB HDD x 8ea)
Environmental	Operating Temperature	+0°C ~ +40°C (+32°F ~ +104°F)
	Operating Humidity	20% ~ 85% RH
Mechanical	Color / Material	Black / Metal
	Dimensions (WxHxD)	440.0 x 88.0 x 384.8mm (17.32" x 3.46" x 15.15") (2U)
	Weight	5.43Kg (11.97 lb) (without HDD)

\* The latest product information / specification can be found at [hanwha-security.com](http://hanwha-security.com)

\* Design and specifications are subject to change without notice.

\* Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.